


DESCRIPTION

The M-124FX is a professional compact 12 Channel Mixing Console, great quality and better reliability. You will get the smooth, accurate more natural and open sound from this apparatus, and it is really ideal for gigs, recording. It can be mounted on EIA standard equipment rack.

SPECIFICATIONS

Power Source	100-240V AC 50/60Hz
Power Consumption	30W
Audio Input	MIC input 1-8: -50 dBu, 1.8 kΩ, electronic balanced, female XLR connector LINE input 1-4: -30 dBu, 10 kΩ, electronic balanced, TRS phone-jack LINE input 5-8: -30 dBu, 10 kΩ, stereo pair, electronic balanced, TRS phone-jack LINE input 9-12: -30 dBu, 10 kΩ, stereo pair, unbalanced, RCA connector MAIN INSERT: 0 dBu, 10 kΩ, stereo pair, unbalanced, TRS phone-jack USB input : Audio formats: MP3, Format: FAT16, FAT32, Max. 32GB, USB(A) connector PC input : -30 dBu, USB(B) connector
Audio Output	MAIN MIX OUTPUT : 0 dBu, 120 Ω, stereo pair, electronic balanced, male XLR connector/TRS phone-jack MAIN INSERT: 0 dBu, 120 Ω, stereo pair, unbalanced, TRS phone-jack DFX OUT : 0 dBu, 120 Ω, stereo pair, unbalanced, TRS phone-jack CTRL ROOM: 0 dBu, 120 Ω, stereo pair, unbalanced, TRS phone-jack GROUP OUT 1-4 : 0 dBu, 120 Ω, stereo pair, unbalanced, TRS phone-jack AUX SEND 1-4 : 0 dBu, 120 Ω, unbalanced, TRS phone-jack PHONES : 0 dBu, 120 Ω, stereo pair, unbalanced, TRS phone-jack PC OUT : 0 dBu, USB(B) connector
Frequency Response	20 - 20,000 Hz, ±3 dB
Total Harmonic Distortion	0.03 % (LPF 20 kHz)
S/N Ratio	Over 100 dB (A weighted)
Crosstalk	Over 90 dB (A weighted)
Mute	Over 120 dB (A weighted)
Compressor	0 - 10 dB
Equaliser	Channel 1-4 : ±15dB at 80Hz, ±12dB at 100Hz-8kHz, ±15dB at 12kHz Channel 5-12 : ±12dB at 80Hz, ±15dB at 500Hz, ±15dB at 3kHz, ±12dB at 12kHz
DSP Digital effects	100 Preset effects : vocal, small room, large hall, echo, echo+reverb, flanger+reverb plate, chorus (guitar), rotary (guitar), tremolo (guitar)
Phantom Power	+48 VDC, switchable, MIC input 1-8
Indicators	Power (green) x 1, +48V (red) x 1, Mute (red) x 11, Signal (green) x 8, Peak (red) x 8 Output level (green) x 18, (yellow) x 4, (red) x 2 PFL (yellow) x 9, DFX mute (red) x 1, Compressor (yellow) x 4
Operating Temperature	0°C to +40°C (32 °F to 104 °F)
Operating Humidity	90% RH or less (no condensation)
Finish	Case: Surface-treated steel plate, black, paint
Dimensions	388.1 (W) × 433.2 (H) × 89.4 (D) mm (15.28" × 17.05" × 3.52")
Weight	5.5 kg
Accessory	ER type power cable ...1, UK type power cable ...1, rack mounting bracket ...2, Rack mounting screw ...8

APPEARANCE

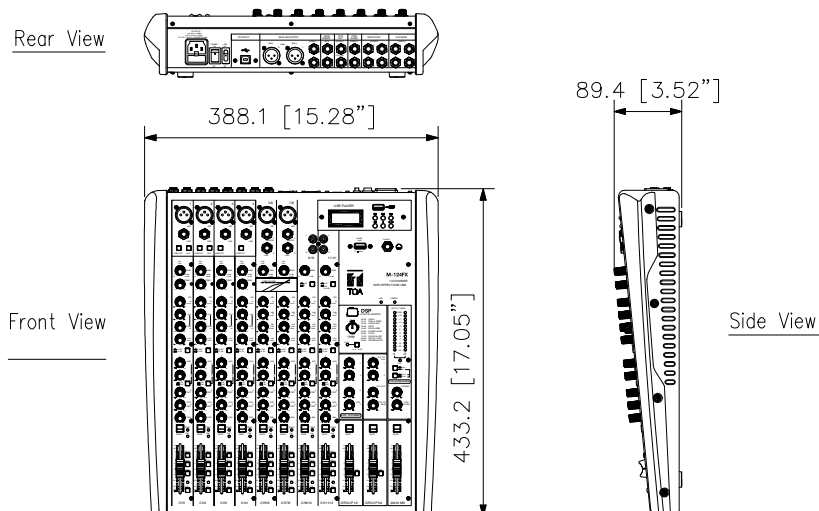

UNIT:mm SCALE:1/10