



SPECIFICATIONS

Model number	WG-D100T-EB WD4D00	WG-D100T-AS WM1D00	WG-D100T-AS WC4D01
Frequency	863-865MHz	510-530MHz	748.3-757.7 803.3-805.7MHz
Modulation	GFSK		
Audio sampling	8KHz 16bit		
Latency	22ms		
Frequency response	65Hz-3.8kHz		
Dynamic range	> 80 dB		
Signal to Noise	> 70 dB		
THD at 1KHz	< 1.5%		
Service coverage	Indoor: 100m / Outdoor: >150m		
Operating temperature	-10 ~ 50°C		
RF output power	10 mW		
3.5mm phone jack	Mic in x 1 / Aux in x 1		
Microphone source	Built-in & External		
Input level	Mic: -35.5dBV / Aux: -25dBV		
Front + & - buttons	Channel selector		
Power button	Power on / off and Mute		
Side Momentary 3way tact switch	+ : Volume up		
	Center push : Corresponding frequency		
	- : Volume down		
Battery	Ni-MH type "AA" 1.2V x 1 / Alkaline "AA" 1.5V x 1		
Battery life (approx.) w/ 2600mAh battery	12 hr		
Charging source	The data has been measured using 1x AA NiMH 2600mAh rechargeable battery.		
Charging time	DC 5V Micro USB		
Charging current	Depends on battery type and capacity		
LCD display	255±10 mA		
Antenna	Channel, Battery indicator, Volume, Signal Strength		
Regulatory compliance	Whip		
Dimension	CE FCC		
Weight	40(W) × 24.6(D) × 83.5(H)mm , Antenna length not included		
Color	38.6 g (batteries not included)		
Accessories	Black frame		
Lapel mic : LM-17	O	O	O
Belt clip : BC-01	O	O	O
Lanyard(Black) : LY-01B	O	O	O
Ni-MH rechargeable battery : RB2600	O	X	X
Universal USB adapter : MUA-11	X	O	O
USB cable : USBY-01	X	O	O


■ APPEARANCE

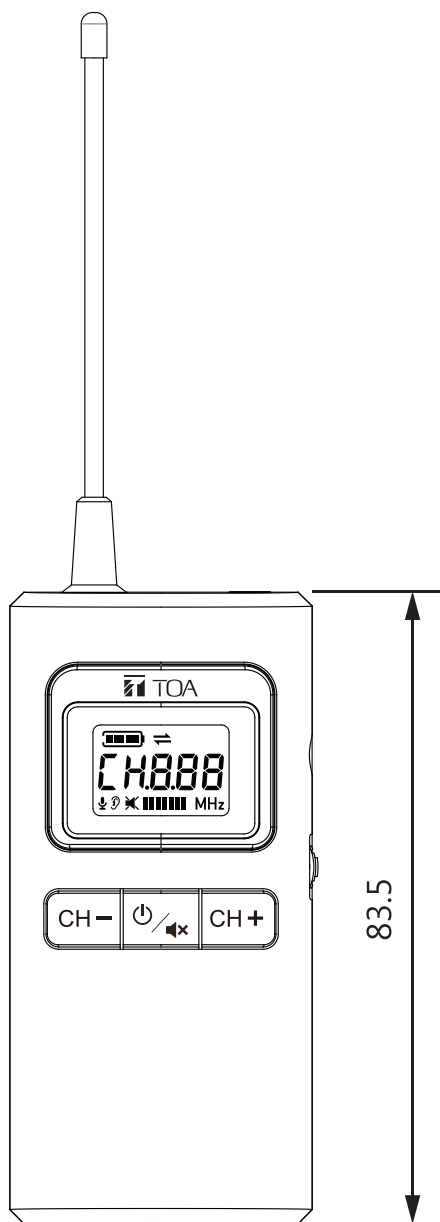


Front view

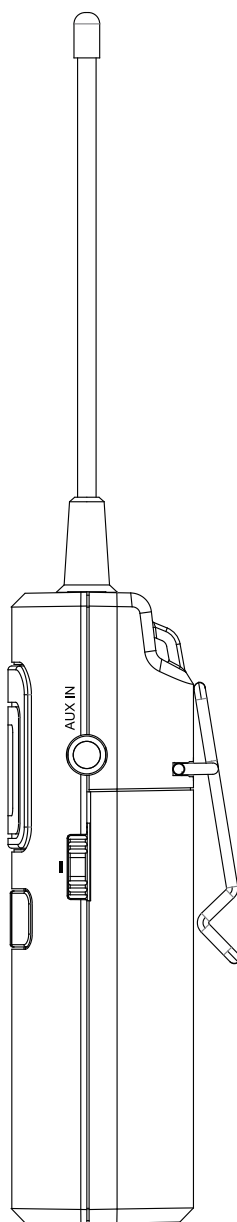


Side view

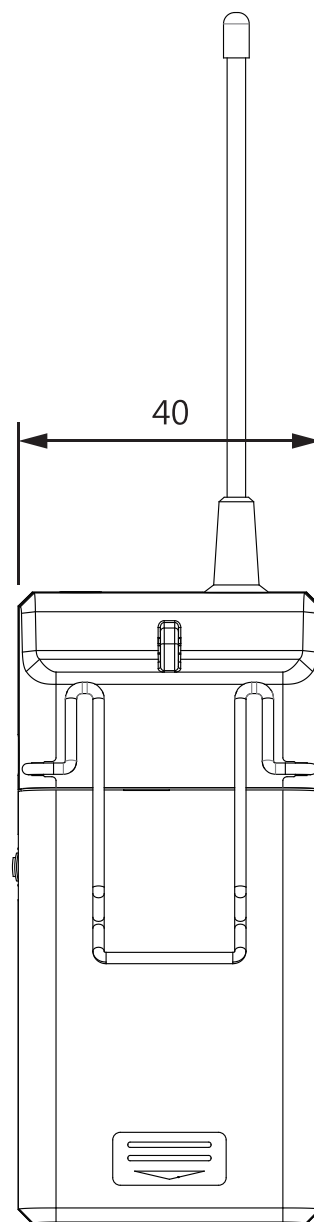

Rear view

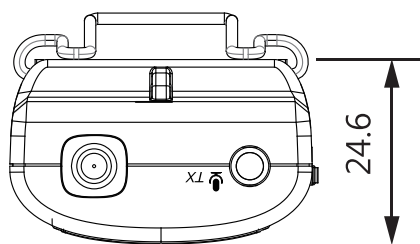

Top view



Bottom view

UNIT: mm SCALE: 1/1