



SPECIFICATIONS

Model number	WG-D120T-AS WM1D00	WG-D120T-AS WC4D00
Frequency	510-530MHz	803.3-805.7MHz
Modulation	GFSK	
Audio sampling	8KHz 16bit	
Latency	35ms	
Frequency response	65Hz-3.8kHz	
Dynamic range	> 80 dB	
Signal to Noise	> 60 dB	
THD at 1KHz	< 5.2%	
Service coverage	Indoor: 100m / Outdoor: >150m	
Operating temperature	-10 ~ 50°C	
RF output power	10 mW	
Receiver sensitivity	-88 dBm	
3.5mm phone jack	Mic in x 1 / Aux in x 1	
Microphone source	Built-in & External	
Input level	Mic: -35dBV / Aux: -20dBV	
Front + & - buttons	Channel selector	
Power button	Power on / off and Mute	
Side Momentary 3way tact switch	+ : Volume up	
	Center push : 2-way mode	
	- : Volume down	
Battery	Ni-MH type "AA" 1.2V x 1 / Alkaline "AA" 1.5V x 1	
Battery life (approx.) w/ 2600mAh battery	12 hr	
Charging source	The data has been measured using 1x AA NiMH 2600mAh rechargeable battery.	
Charging time	DC 5V Micro USB	
Charging current	Depends on battery type and capacity	
LCD display	255± 10 mA	
Antenna	Channel, Battery indicator, Volume	
Regulatory compliance	2-way communication indicator, Signal Strength	
Dimension	Whip	
Weight	CE FCC	
Color	40(W) × 24.6(D) × 83.5(H)mm , Antenna length not included	
Accessories	38.6 g (batteries not included)	
Lapel mic : LMR-18	O	O
Belt clip : BC-01	O	O
Lanyard(Black) : LY-01B	O	O
Ni-MH rechargeable battery : RB2600	X	X
Universal USB adapter : MUA-11	O	O
USB cable : USBY-01	O	O


■ APPEARANCE

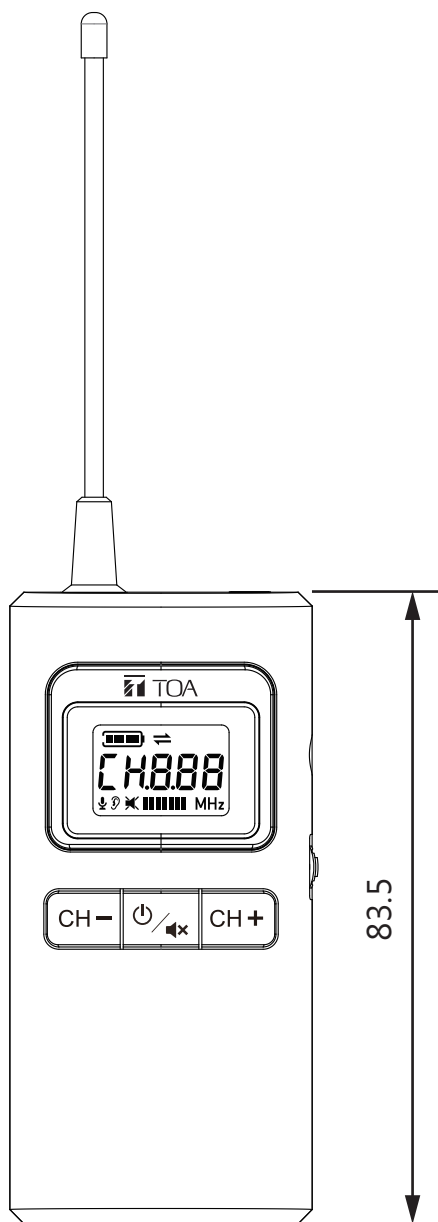


Front view

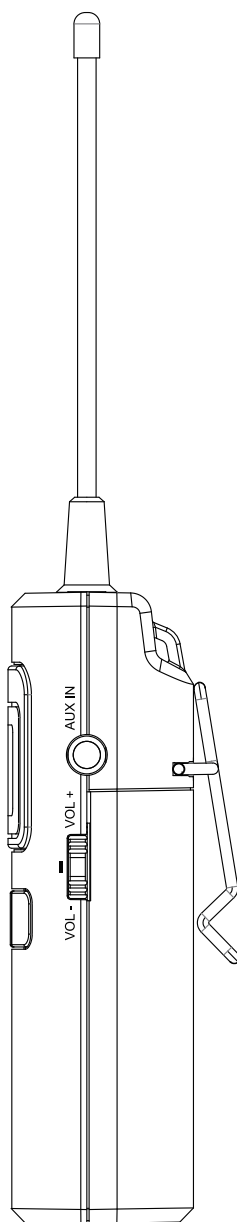


Side view

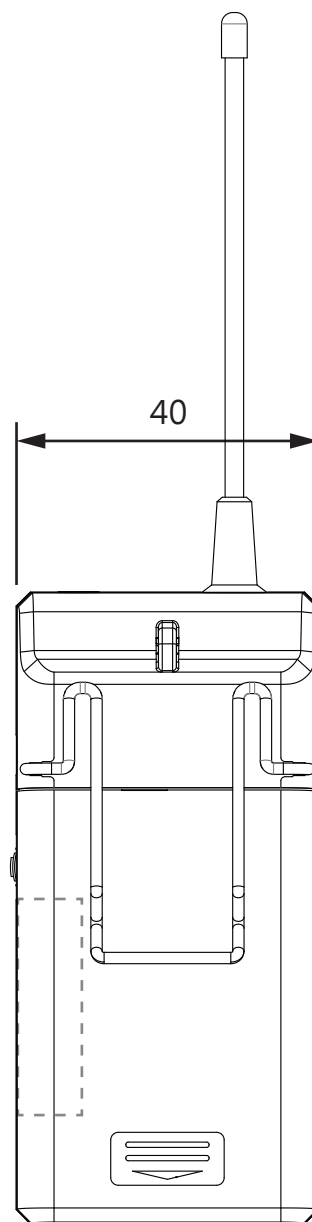

Rear view

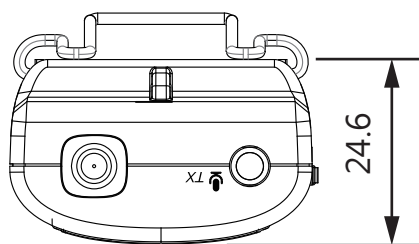

Top view



Bottom view

UNIT: mm SCALE: 1/1