

DESCRIPTION

BS-PE678IP1 is a IP wall mount speaker which can receive broadcast from other terminals or servers, and supports system setting via browser, which has loop detection function to detect horn.


BS-PE678IP1 allows connectivity to Ethernet-powered devices.

SPECIFICATIONS

*0dB=1V

Speaker Component	6 " (16cm) double cone-type
Power Source	DC24V, DC jack or PoE(IEEE 802.3at)
Power consumption	less than 5W(standby)
Rated Output(DC supply)	2 × 7W
Rated Output(PoE supply)	2 × 7W
Sound Pressure Level	94dB (1m/1w)
Frequency response	100–18,000Hz
Network I/F	10BASE-T/100BASE-TX, automatic determination
Network protocol	UDP, ARP, ICMP, HTTP, IGMP
Operating Temperature	–20°C~+50°C
Operating Humidity	90%RH or Less (No condensation)
Finish	Baffle: HIPS, off-white Cabinet: Particle board with pvc sheet, off-white Grille: Surface-treated steel plate net, off-white
Dimension	250 (W) × 190 (H) × 110 (D) mm(unit only)
Weight	1.56 kg (unit only)
Accessories	Speaker mounting screw(4 × 35)...2, 4P connection terminal(1 PCS),

APPEARANCE

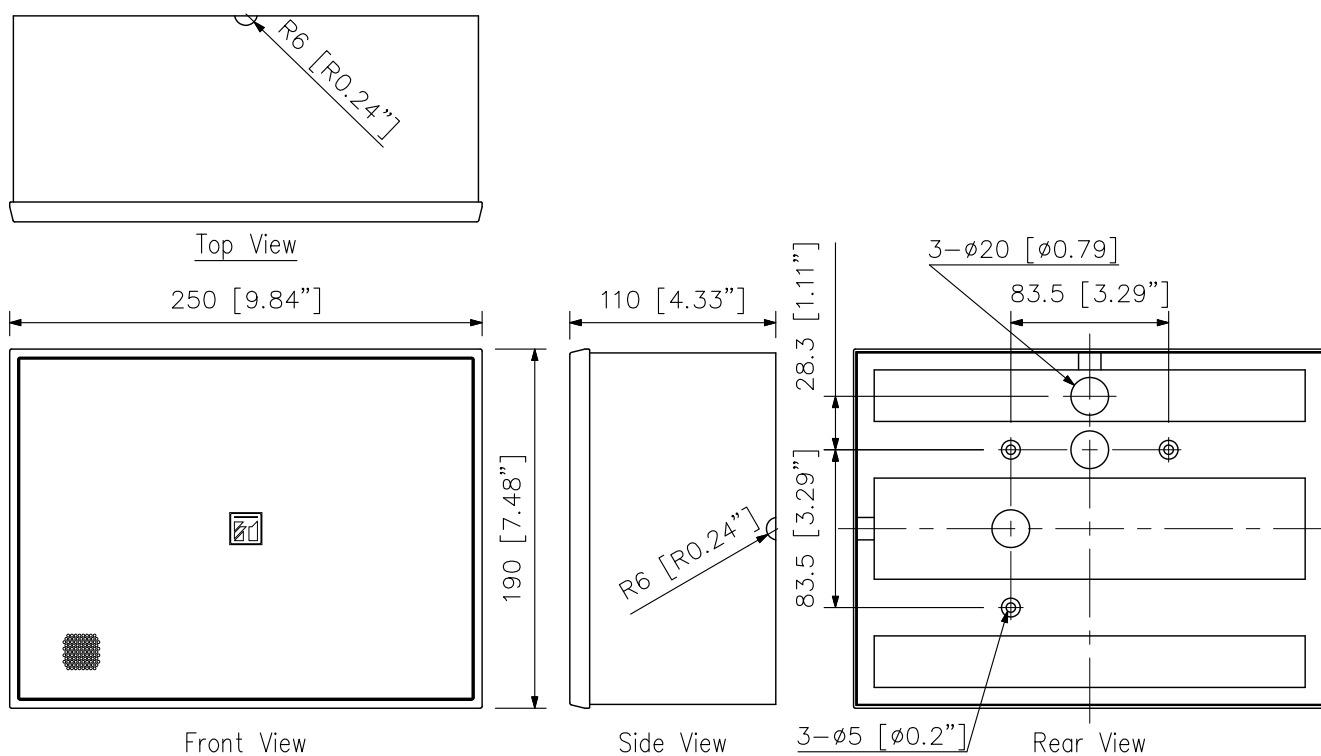

UNIT: mm