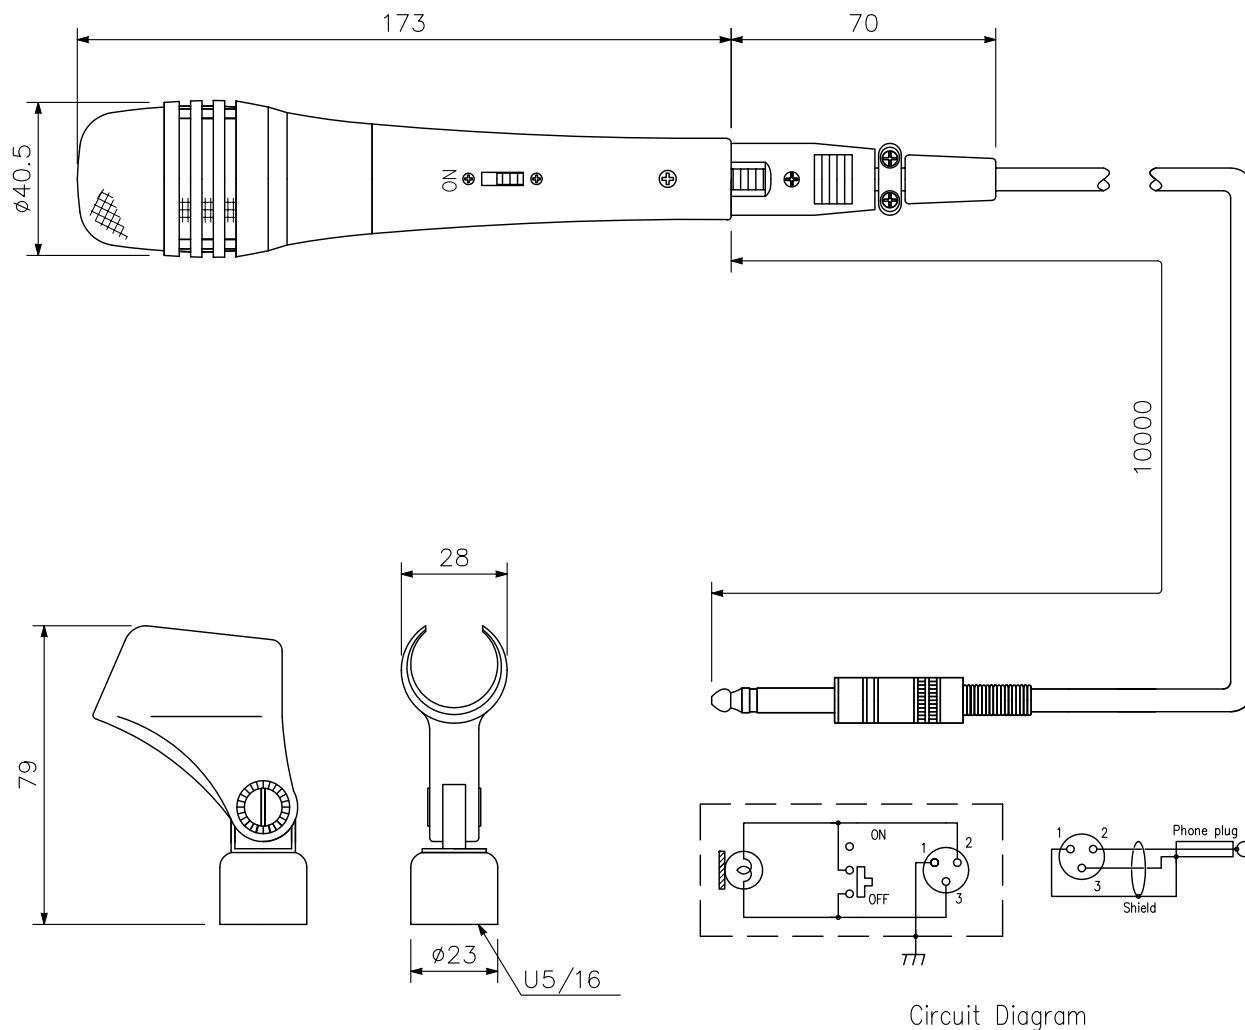


**DESCRIPTION**

The DM-1500 is designed for both voice and speech applications.

**SPECIFICATIONS**

|                    |                                                                                           |
|--------------------|-------------------------------------------------------------------------------------------|
| Type               | Moving coil microphone                                                                    |
| Directivity        | Unidirectional                                                                            |
| Rated Impedance    | 600 $\Omega$ , balanced                                                                   |
| Rated Sensitivity  | -56 dB (1 kHz 0 dB=1 V/Pa)                                                                |
| Frequency Response | 70 Hz - 15 kHz                                                                            |
| Connection Cables  | 2-core shielded cable, unbalanced                                                         |
| Cable Length       | 10 m                                                                                      |
| Terminal of Cable  | Phone plug                                                                                |
| Talk Switch        | Short-off, slide switch                                                                   |
| Finish             | Body : Die-cast zinc, metallic gold<br>Head : Brass/zinc-plated steel wire, metallic gold |
| Dimensions         | $\phi 40.5 \times 6.81$ mm                                                                |
| Weight             | 280 g (without connection cable)                                                          |
| Accessory          | Microphone holder (U5/16)                                                                 |

**APPEARANCE**


UNIT:mm SCALE:1/2