

DESCRIPTION

TOA's A-3500D Series is a PA amplifier equipped with 4 microphone inputs and 1 auxiliary inputs, and 2-channel zone selector. It employs a PFC circuit.

The A-3500D Series mixer amplifier is ideal for paging announcement and BGM applications in schools, offices, and super markets.

SPECIFICATIONS


Power Source	100 – 240 V AC, 50/60 Hz
Rated Output	60 W
Power/Current Consumption	96 W (rated output), 40 W (based on EN62368), 200 mA or less (when power switch is OFF)
Frequency Response	50 Hz – 20 kHz ± 3 dB (1/8 rated output)
Distortion	1 % or less at 1 kHz, rated power (20 kHz LPF (AUX-0025))
Tone Control	Bass: ± 10 dB at 100 Hz Treble: ± 10 dB at 10 kHz
Signal to Noise Ratio	88 dB or more (Master volume: min.) 76 dB or more (Master volume: max.) 55 dB or more (INPUT 1 – 4) 72 dB or more (INPUT 5) (A-weighted)
Audio Input	INPUT 1, 2: -60 dB (*) (MIC)/ -20 dB (*) (LINE) selectable, 600 Ω , electronically-balanced, removable terminal block (5 pins)/ $\phi 6.3$ mm phone jack (2P) Note: MIC inputs are equipped with phantom power (24 V DC, ON/OFF switchable). INPUT 3: -60 dB (*), 600 Ω , electronically-balanced, $\phi 6.3$ mm phone jack (2P) INPUT 4: -60 dB (*) (MIC)/ -20 dB (*) (LINE) selectable, 600 Ω , electronically-balanced, $\phi 6.3$ mm phone jack (2P) INPUT 5: -20 dB (*), 10 k Ω , unbalanced, RCA pin jack $\times 2$ PWR AMP IN: 0 dB (*), 600 Ω , unbalanced, RCA pin jack
Audio Output	SPEAKER OUT: Low impedance (8 – 16 Ω)/ High impedance (DIRECT, ZONE 1/ZONE 2: 100 V/total 170 Ω), removable terminal block (6 pins) (ZONE 1/ZONE 2 is selectable, Max. 60 W per output) REC OUT: 0 dB (*), 600 Ω , unbalanced, RCA pin jack LINE OUT 1, 2: 0 dB (*), 600 Ω , unbalanced, RCA pin jack (Interlock with zone selection is possible)
Control Input	2 channels, no-voltage make contact input, open voltage: 35 V DC or less, short-circuit current: 10 mA or less, removable terminal block (5 pins) ZONE CONTROL IN: No-voltage make contact input, open voltage: 35 V DC or less, short-circuit current: 10 mA or less, removable terminal block (4 pins)
Control Output	POWER REMOTE OUT: Open collector output, withstand voltage: 30 V DC or less, control current: 25 mA or less, removable terminal block (4 pins) EMERGENCY OUT: Open collector output, withstand voltage: 30 V DC or less, control current: 25 mA or less, removable terminal block (4 pins) ZONE CONTROL OUT: Open collector output (polarized), withstand voltage: 30 V DC or less, control current: 25 mA or less, removable terminal block (4 pins)
Indicators	5-point LED output level meter, Power indicator LED, Priority indicator LED, Emergency indicator LED, Thermal protection indicator LED, Over current protection indicator LED, Zone 1 indicator LED, Zone 2 indicator LED
Operating Temperature	-10°C to $+40^{\circ}\text{C}$ (14°F to 104°F)
Operating Humidity	85 %RH or less (no condensation)
Finish	Panel: ABS resin, black Case: Surface-treated steel plate, black, paint
Dimensions	420 (W) $\times$ 96.1 (H) $\times$ 313.1 (D) mm (16.54" $\times$ 3.78" $\times$ 12.33")
Weight	4.9 kg (10.8 lb)
Accessory	Power cord (2 m (6.56 ft)) $\times 1$, Audio input removable terminal plug (3.81 mm, 5 pins) $\times 2$, Control I/O removable terminal plug (3.81 mm, 4 pins) $\times 2$, Remote control removable terminal plug (3.5 mm, 4 pins) $\times 1$, Speaker out removable terminal plug (5 mm, 6 pins) $\times 1$, Volume control cover $\times 4$
Option	Rack mounting bracket: MB-25B Perforated panel : PF-013B

(*) 0 dB = 1 V


■ APPEARANCE

Rear View



1CE
model

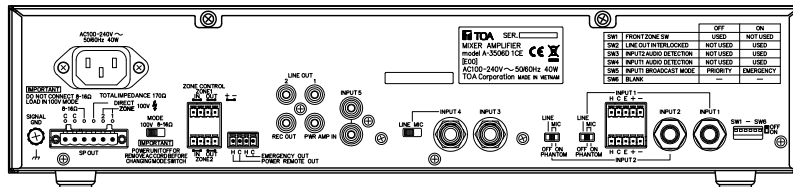



AC plug




2CE
model

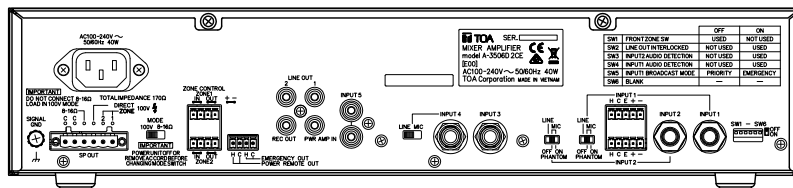


4CE
model

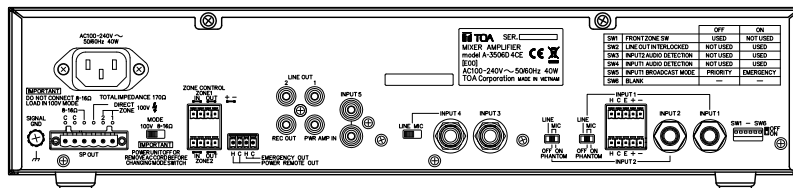

Front View

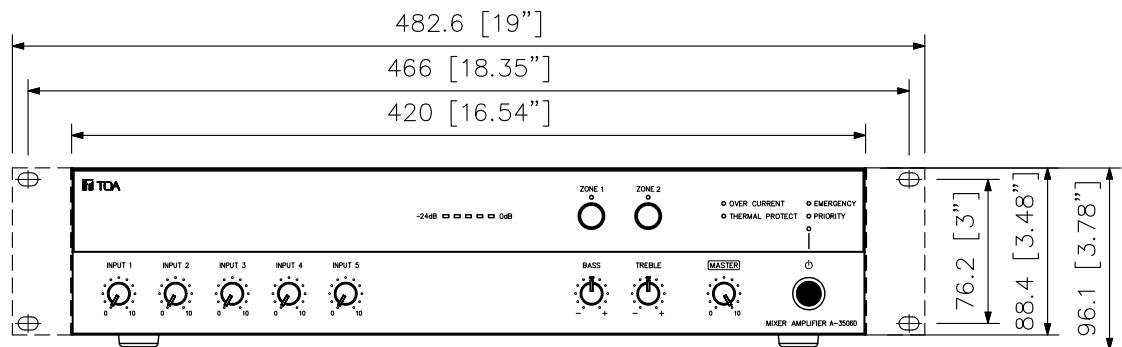

Side View

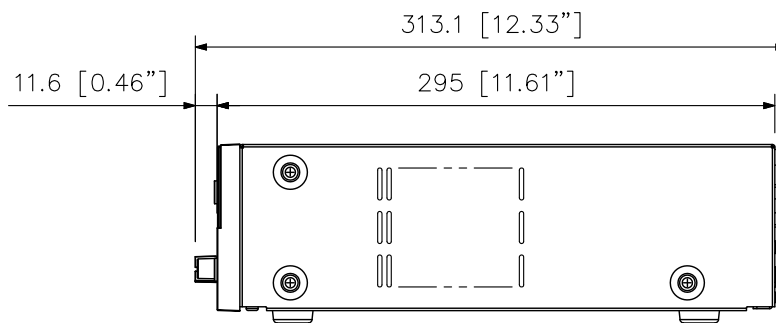

UNIT:mm SCALE:1/4