



SS-2010 SPEAKER SELECTOR

www.amthanhtoa.vn



***Easy selection of up to 10 speaker zones with
uninterrupted BGM***


SS-2010 Speaker Selector

TOA SS-2010 Speaker Selector is designed to effectively select required speaker zones in a public address system and is ideal for small to medium-sized installation. With the SS-2010, up to 10 speaker zones for paging and 10 speaker zones for background music can be selected. In the situation where announcements have to be made to all zones, an All Call button can be selected to broadcast the message to all areas. Uninterrupted background music setup can be configured so that paging in one zone does not affect the background music in other zones. The selection of speaker zones is made easier with TOA's SS-2010.

Features:


- DC power consumption is small
- LED indicator for each selector
- 10 selectors for paging
- 10 selectors for background music
- 1 selector for all call (paging)
- Protection for DC input overload and reversed DC polarity installation

Connection Example

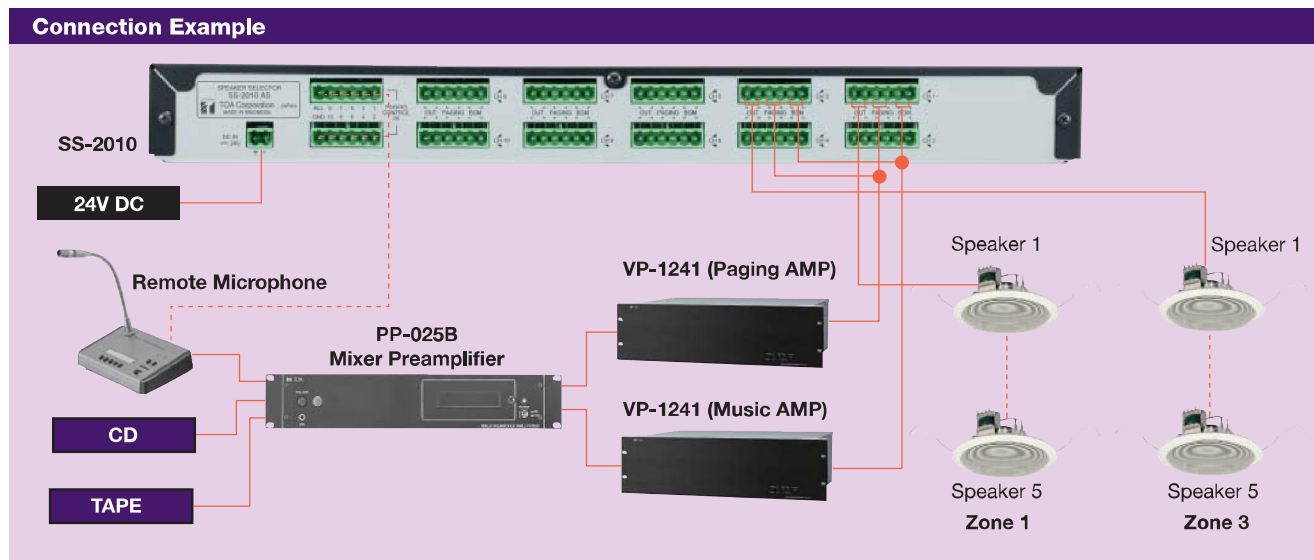

Specifications

Model	SS-2010 AS	
Voltage Source	24V DC	
Current Consumption	1.0 A DC	
Inputs	10 Inputs BGM 10 Inputs Paging	
Output	10 Outputs, each output channel max 200W at 100V line	
Controls	Front	Rear
	10 BGM Selectors 10 Paging Selectors 1 All Call Selector for All Paging	1-10 Paging Controls In All Paging Control In for All Paging
Indicator LED	10 BGM Selector LEDs 10 Paging Selector LEDs 1 All Call LED	
Operating Temperature	0°C to +40°C	
Finish	Front Panel: Aluminum Hair Line, Etching Black Case: Steel Plate, Painting, Black	
Dimensions	420 (W) x 44 (H) x 320 (D) mm	
Weight	3.2kg	
Accessories	6P connectors (12pcs), 2P connector (1pc)	



Human Society with
Sound & Communication

TOA Electronics Pte Ltd
www.amthanhtoa.vn

Specifications are subject to change without notice.
Printed in Singapore (65) 865-0611-01A