

■ DESCRIPTION


TOA A-260DU-AS is a Mixer Power Amplifier consist of 2 Mic input and 2 AUX input. Its power rated at 60W is ideal used for BGM or Paging requiring small power outputs.

■ SPECIFICATION

Power Source	AC220V 50/60 Hz
Output Rated	60W
Power Consumption	100W (Rated Output)
Frequency Response	50 Hz ~ 20k Hz
Distortion	Less than 1%
Input	MIC 1, 2: -60dB (*1) 600 Ω Unbalanced, PhoneJack AUX 1, 2: -20dB (*1) 10k Ω Unbalanced, RCA pinjack
Output	Speaker : 170Ω (High Impedance, 100V Line), 4 Ω Line Out : 0dB (*1) 600Ω Unbalanced, RCA pinjack
S/N Ratio	MIC 1, 2: More Than 60dB AUX 1, 2: More Than 60dB (JIS-A)
Muting	MIC 1 mutes other input signals wiith 0 ~ 30 dB attenuation
Indicator	Power (Green), Input Signals (Green)
Operating Temperature	0 °C ~ +40 °C
Operating Humidity	35% ~ 80% RH (No condensation)
Finish	Panel : ABS Resin Black, Hairline Case : Steel plate Black, Paint
Dimensions	250 (W) x 67.6 (H) x 217.2 (D) mm
Weight	2.6kg

(\*1) 0 dB = 1 V

■ APPEARANCE

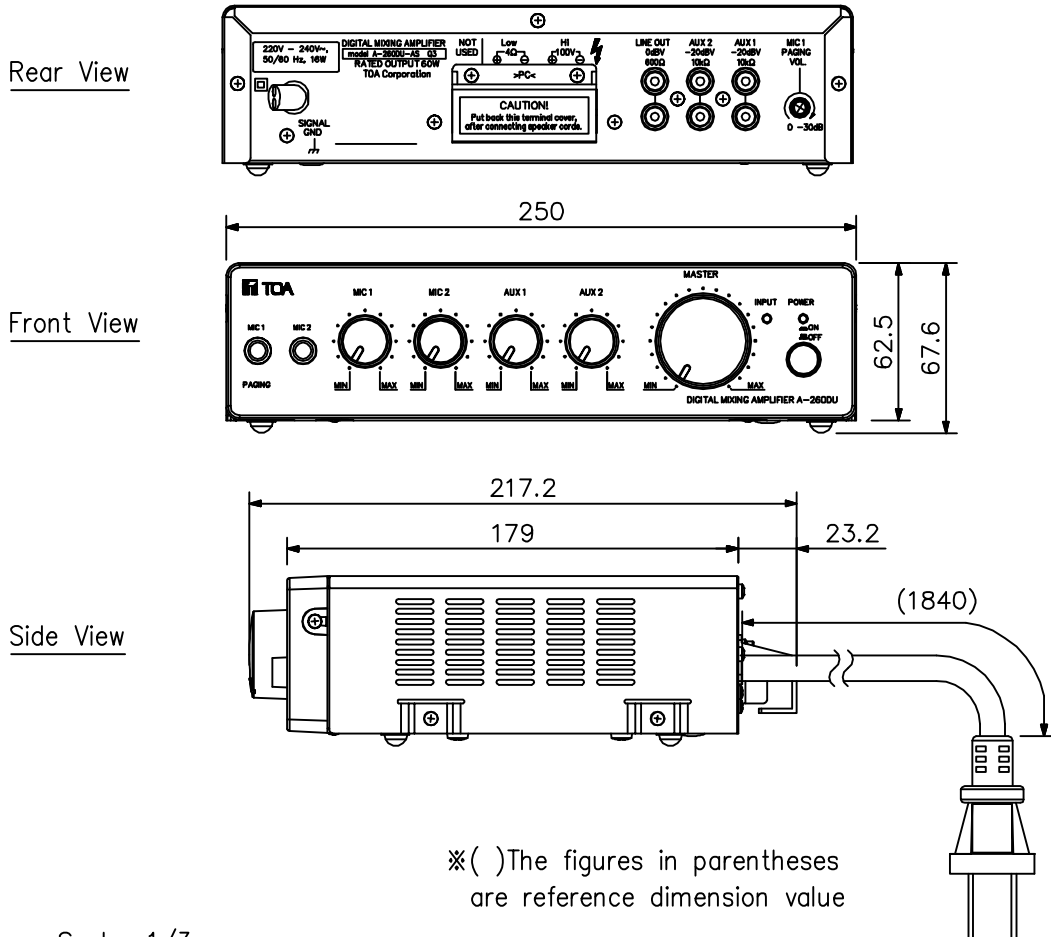

※( )The figures in parentheses are reference dimension value

Unit: mm Scale: 1/3