

SS-1010 & SS-1010R SPEAKER SELECTORS



Select up to 10 zones or page to all areas with the All Call button

SS-1010 & SS-1010R Speaker Selectors

TOA SS-1010 and SS-1010R Speaker Selectors offer the function of selecting speaker zones in a public address system at an affordable price. With the SS-1010 or SS-1010R, up to 10 speaker zones can be selected. In the situation where announcements have to be made to all zones, an All Call/Zone button can be selected to broadcast the message to all areas.

With the SS-1010, which is for 2-wire connection, music or paging zones can be selected by using the hard buttons or remote control switch.

With the SS-1010R, which is for 3-wire connection, any previously selected BGM zones will be muted when paging is done to other zones. The volume control will be override to the maximum volume.


Features:

- 1U 19" rack size
- 10 zone selectors and 1 all call selector
- · Remote control for zone select and all call select
- Expandable to unlimited zones
- Protection for DC input overload and reversed DC polarity installation

Specifications

Model		SS-1010 AS	SS-1010R AS
Voltage Source		24V DC	
Current Consumption		1.0 A DC	
Inputs		10 Inputs Zone, 1 Emergency Override	10 Inputs BGM/Paging, 1 Link as Input/Output
Output		10 Outputs Zone, each zone max. output 200W	10 Outputs with 3 wire R-H-C, each zone max. output 200W
Controls	Front	10 Zone Selectors, 1 All Zone Selector	10 BGM Selectors, 1 All Call Selector
	Rear	1-10 Zone Controls In, All Zone Control In	1-10 Paging Controls In, All Paging Control In
Indicator LED		10 Zone Selector LEDs, 1 All Zone LED	10 BGM Selector LEDs, 10 Paging Selector LEDs, 1 All Call LED
Operating Temperature		0°C to +40°C	
Finish		Front Panel: Aluminum Hair Line, Etching Black / Case: Steel Plate, Black	
Dimensions		482 (W) x 44(H) x 320 (D) mm	
Weight		3.2kg	
Accessories		6P connectors (12pcs), 2P connector (1pc)	



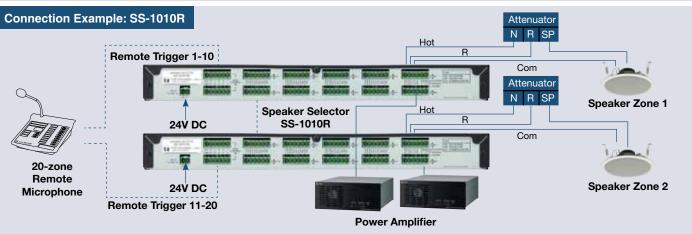



TOA Electronics Pte Ltd

www.toa.com.sg